

APPLICATIONS >

The ELYSIUM PENDANT CHANDELIER forms a stunning focal point in any space. Three separate ovals (or circles) utilize a minimal 1.4" curved extruded housing and opal diffuser for uniform distribution. Ideal for high-end residential, hospitality, retail, restaurant, entertainment venues, corporate offices, conference rooms, atriums.

LED >

VIVIO™ LED Photon Series offers numerous choices in the latest LED technology, Kelvin temperatures range from 2400K to 5000K. Choose standard Blue emission LEDs or our patented Circadian-Safe™ Violet chip emission to achieve the highest CRI available. Our RGBWW (5-in-1 Red-Green-Blue-Double White) provides two additional white LEDs, one warm white and one cool white, achieving a wider color spectrum. Ascenti's Circadian-Safe™ Tunable White option allows precise color temperature control in an effort to safely maintain our natural circadian rhythm.

LUMEN PACKAGES >

4.4 watts per linear foot. Custom lumen packages available.

CONSTRUCTION >

Extruded aluminum housing (high grade, low copper, 6063 T5). Acrylic lens regressed 1/4". All electrical components are installed, wired and 100% tested prior to shipping.

MOUNTING >

Cable Suspension [CS] utilizes 1/8" stainless steel aircraft cables and adjustable, locking, GripLock hardware. Field-adjustable lengths allow installer to angle individual rings or keep horizontal. For any cable length over 4'-0", consult factory. Powdercoated canopy with dual powercords.

FINISH >

5-stage pre-treatment process with a polymer primer sealer, oven baked and top-coated with thermoset super TGIC polyester powdercoat finish. Finish is rated to meet the AAMA 605.2 performance specification which includes passing a 3000hr salt spray test for corrosion resistance.

DRIVERS >

Drivers shall be remote and require engineering consultation to ensure proper loading. Maximum luminaire distance from driver is approximately 35 FT.




RATED >

UL. ETL. CSA. Damp location.

WARRANTY >

3 years.



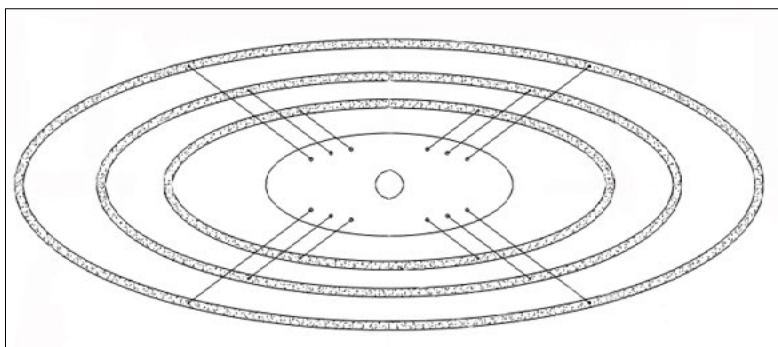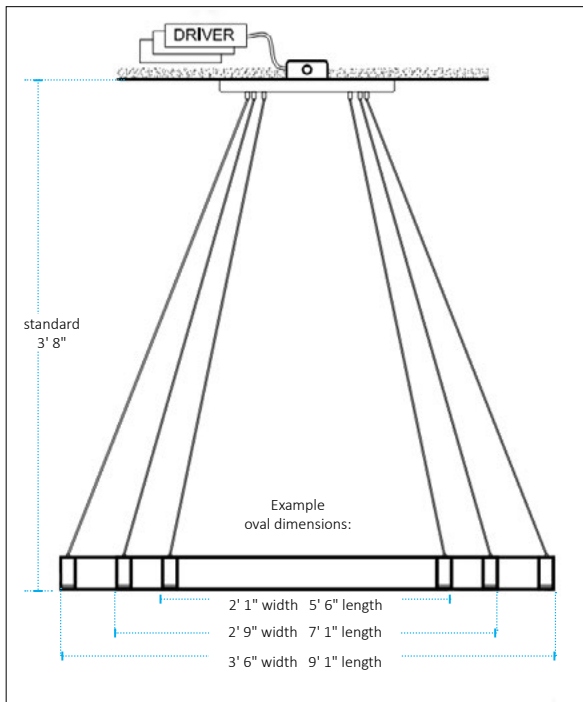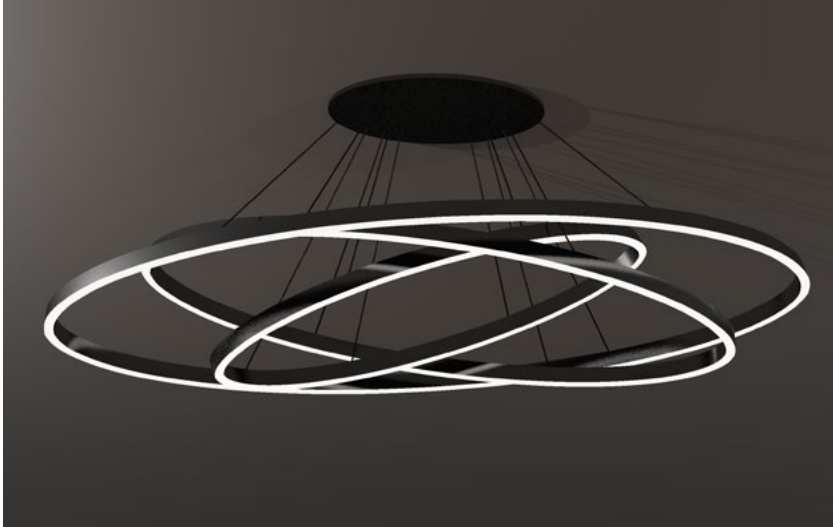

Type: Qty: Project:

ELY-	ELYSIUM PENDANT CHANDELIER	
	Size Nominal dimensions	
9x4	9ft x 3-½ft outside OVAL, (3) OVALS total	
12R	12ft diameter outside RING, (3) RINGS total	
	Diffuser	
WH	Opal Acrylic	
C	Custom Diffuser	
	Color Temperature	
24K	2400°K Standard	
24CS	2400°K Circadian-Safe™	
27K	2700°K Standard	
27CS	2700°K Circadian-Safe™	
30K	3000°K Standard	
30CS	3000°K Circadian-Safe™	
35K	3500°K Standard	
35CS	3500°K Circadian-Safe™	
40K	4000°K Standard	
40CS	4000°K Circadian-Safe™	
50K	5000°K Standard	
RGB	RGB	
RWW	RGBWW (5-in-1 Red-Green-Blue-Warm White-Cool White)	
TW	Tunable White Standard (27K- 50K)	
TCS	Tunable White Circadian-Safe™ (18CS-30CS)	
CK	Custom Kelvin (contact factory)	
	Output	
4.4	4.4 watts per foot	
	Voltage	
U	120V - 277V	
	Control	
N	Non-Dimmable	
010	0-10V Dimmable Driver (120v-277v)	
ELV	ELV Triac Dimmable Driver (120v-277v)	
DMX	DMX Control (consult factory)	
DAL	Dali Dimming	
LUT	Lutron Ecosmart Dimming (consult factory)	
	Mounting	
CS	Cable Suspension (stainless steel, 4' adjustable)	
	Housing Color	
WH	White	
BK	Black	
SV	Silver	
DBZ	Dark Bronze	
CC	Custom RAL color (consult factory)	