








Low Profile



Adjustable



Spring Clips



Dimensions

APPLICATIONS > The ROGUE DOWNLIGHT...a paradigm shift on the concept of the perfect downlight. Elegance and precision unite in this minimal 2" low-profile housing designed for accent, task or wallwash applications. Adjustable lamp for specific aiming capability.

LED > VIVIO™ LED Photon Series offers numerous choices in the latest LED technology. Kelvin temperatures range from 2700K to 5000K at > 90CRI. RGBWW (5-in-1 Red-Green-Blue-Double White) provides two additional white LEDs, one warm and one cool, achieving a wider color spectrum.

LUMEN PACKAGES > Medium spot distribution with 24° beam angle. 2.7W / 244 lumens. Custom lumen packages available.

CONSTRUCTION > Low-profile aluminum housing with adjustable lamp positioning. Spring clips for simple installation. LED is mounted to die-cast/extruded aluminum heat sink for active heat dissipation. All electrical components are installed, wired and 100% tested prior to shipping.

FINISH > Die-cast aluminum. Alternate colors are available. Consult factory.

RATED > UL, CSA. Indoor Dry/Damp Location.

WARRANTY > 3 years.



Type: Qty: Project:

ROG- ROGUE Downlight Series

2R ROGUE 2" Round

2R 2" Round Flanged

Color Temperature

27K	2700°K
30K	3000°K
35K	3500°K
40K	4000°K
50K	5000°K
RGB	RGB
RWW	RGBWW (5-in-1 Red-Green-Blue-Warm White-Cool White)
CK	Custom Kelvin

Output

3W 2.7 watts / 244 lumens

Distribution

SP Spot

Voltage

1 120V direct

Control


N	Non-Dimming
O10	0-10V Dimmable
ELV	ELV Triac Dimmable
DAL	Dali Dimming (consult factory)

Mounting

SC	Spring Clip
CM	Custom Mount (consult factory)

Trim Finish

AL	Natural Aluminum (standard)
CC	Custom RAL color (consult factory)

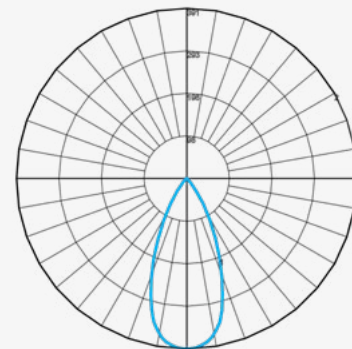

24° spot