


REBEL COM-1



REBEL COM 2

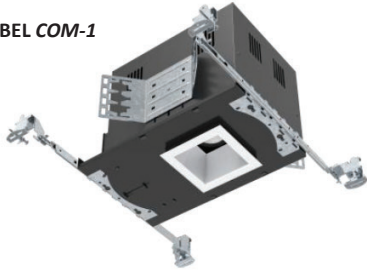

REBEL COM-3



REBEL COM-4



APPLICATIONS > The REBEL-COM DOWNLIGHT... This minimal 6 1/4" wide aperture recessed COB downlight offers high performance and energy efficiency in a small aperture for precision accent, task or wallwash applications. Innovative design allows LED positioning closer to the aperture for maximum light output and minimized glare from trim reflection. Choose painted trim flange or trimless (mesh flange for seamless drywall applications).

LED > VIVIO™ LED Photon Series offers numerous choices in the latest LED technology. Kelvin temperatures range from 2700K to 5000K. Choose standard Blue emission LEDs.

LUMEN PACKAGES > 20W/1600 lumens per lamp. Choose 80+CRI or 90+CRI. 36° Flood, 12° spot or 24° narrow spot distribution.

CONSTRUCTION > Easy installation and maintenance. All parts and component accessible from below the ceiling. Lamp holders are adjustable 360° horizontal.

MOUNTING > Designed for new commercial or residential construction using a butterfly bracket "standard" or universal hangar bar. Fixture may be installed in 1/2" to 1 1/4" thick ceilings.

FINISH > 5-stage pre-treatment process with a polymer primer sealer, oven baked and top-coated with thermoset super TGIC polyester powdercoat finish. Finish is rated to meet the AAMA 605.2 performance specification which includes passing a 3000hr salt spray test for corrosion resistance.

RATED > UL, CSA. Dry/damp Location. Non-IC housings are standard; IC-Rated air-tight housing option is available (specify).

WARRANTY > 3 years.

Type: Qty: Project:

REB- REBEL COM Downlight Series

REBEL COMMERCIAL

Com1
Come2
Come3

Flange Type

T Trimmed flange (shown)
L Trimless (mesh flange for seamless drywall)

Color Temperature

30K 3000°K Standard
35K 3500°K Standard
40K 4000°K Standard
50K 5000°K Standard

Output

20W 20W / 1600 lumens per lamp
20W8 20W / 1600 lumens per lamp (80+ CRI)
20W9 20W / 1600 lumens per lamp (90+CRI)

Distribution

FL 36° Flood
SP 12° Spot
NS 24° Narrow Spot

Control

N Non-Dimming
O10 0-10V Dimmable
ELV ELV Triac Dimmable
DMX DMX Control (consult factory)
DAL DALI Dimming (consult factory)


Mounting

B Butterfly Bracket (standard)
U Universal Mounting Bracket (adder)

Trim Finish

SN Trimmed
WH Trimless

DIMENSIONS

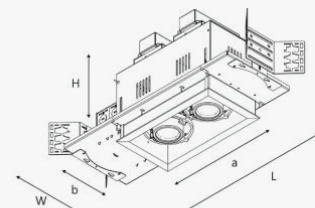

1x1 SPOTS
L: 15 7/8"xW: 8 9/16"xH: 8 11/16"
Cut-Out(axb): 6 1/4" x 6 1/4"


1x3 SPOTS
L: 26 1/4"xW: 8 9/16"xH: 8 11/16"
Cut-Out(axb): 16 5/8" x 6 1/4"

1x4 SPOTS
L: 31 5/16"xW: 8 9/16"xH: 8 11/16"
Cut-Out(axb): 21 3/4" x 6 1/4"


1x2 SPOTS
L: 21 1/8"xW: 8 9/16"xH: 8 11/16"
Cut-Out(axb): 11 1/4" x 6 1/4"

2x2 SPOTS
L: 21"xW: 13 3/4"xH: 8 11/16"
Cut-Out(axb): 11 7/16" x 11 7/16"

TRIM OPTION

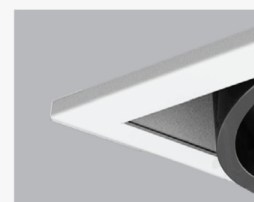

Trimmed

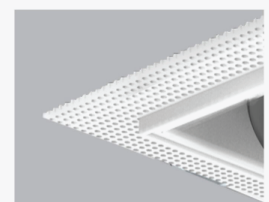

Trimless

