


REBEL ROUND




IC
Housing designed for direct contact with insulation.

REBEL SQUARE

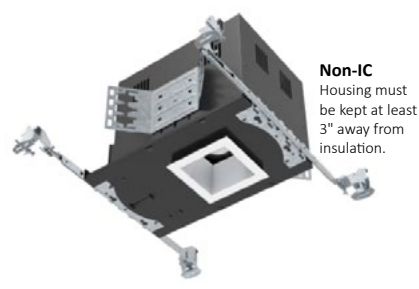

Non-IC
Housing must be kept at least 3" away from insulation.

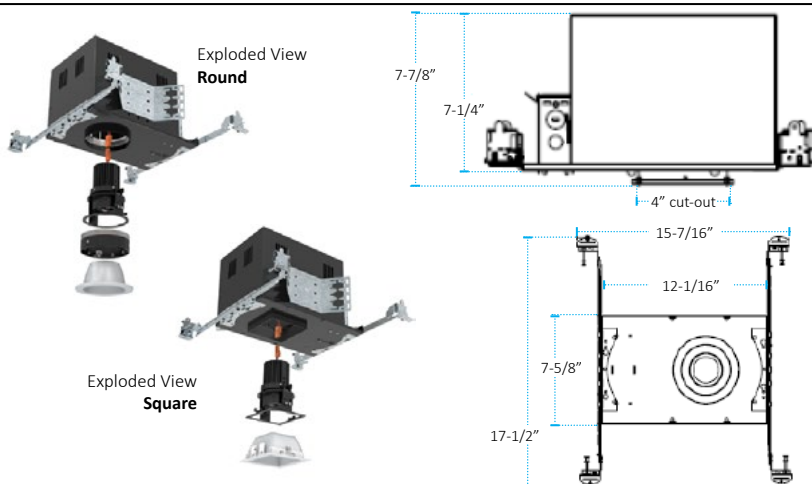

APPLICATIONS > The REBEL 35 DOWNLIGHT... This minimal 3.5" aperture recessed COB downlight offers high performance and energy efficiency in a small aperture for precision accent, task or wallwash applications. Innovative design allows LED positioning closer to the aperture for maximum light output and minimized glare from trim reflection. Choose a Square or Round lamp module with painted Trim Flange or Trimless (mesh flange for seamless drywall applications).

LED > VIVIO™ LED Photon Series offers numerous choices in the latest LED technology, always at 90+ CRI or higher. Kelvin temperatures range from 2700K to 5000K. Choose standard Blue emission LEDs or our patented Circadian-Safe™ Violet chip emission to achieve the highest CRI available. Our RGBWW (5-in-1 Red-Green-Blue-Double White) provides two additional white LEDs, one warm white and one cool white, achieving a wider spectrum of color tone in a single source.

LUMEN PACKAGES > 12W/1000lumens; 15W/1300 lumens; 20W/1600 lumens. Flood, spot or narrow spot distribution. Reflector options: Vertical, Adjustable (0-30° tilt) or Asymmetric Wallwash reflector. All REBEL 35 downlights are inherently dimmable.

CONSTRUCTION > Heavy-duty, cold-rolled steel frame junction box is powdercoated black. LED is mounted to die-cast/extruded aluminum heat sink for active heat dissipation. All electrical components are installed, wired and 100% tested prior to shipping.

MOUNTING > Designed for new commercial or residential construction using a butterfly bracket or universal hangar bar. Fixture may be installed in 1/2" to 1 3/8" thick ceilings. Position lamp vertically and rotationally with a simple screwdriver adjustment. Round style reflectors easily rotate 358° for proper positioning.

FINISH > 5-stage pre-treatment process with a polymer primer sealer, oven baked and top-coated with thermoset super TGIC polyester powdercoat finish. Finish is rated to meet the AAMA 605.2 performance specification which includes passing a 3000hr salt spray test for corrosion resistance.

RATED > UL, ETL, CSA, Damp Location. Non-IC housings are standard; IC-Rated air-tight housing option is available (specify).

WARRANTY > 3 years.



Type: Qty: Project:

REB-	REBEL Downlight Series	
	REBEL 3.5"	
	35R	3.5" Round
	35S	3.5" Square
	Flange Type	
	T	Trimmed flange (shown)
	L	Trimless (mesh flange for seamless drywall)
	Color Temperature	
	27K	2700°K Standard
	27CS	2700°K Circadian-Safe™
	30K	3000°K Standard
	30CS	3000°K Circadian-Safe™
	35K	3500°K Standard
	35CS	3500°K Circadian-Safe™
	40K	4000°K Standard
	50K	5000°K Standard
	RGB	RGB Standard
	RGBWW	RGBWW (5-in-1 Red-Green-Blue-Warm White-Cool White)
	CK	Custom Kelvin
	Output	
	12W	12W / 1000 lumens
	15W	15W / 1300 lumens
	20W	20W / 1600 lumens
	C	Custom lumen package
	Distribution	
	FL	Flood
	SP	Spot
	NS	Narrow Spot
	Downlight / Reflector Type	
	V	Vertical
	A	Adjustable
	W	Wall Wash
	Voltage	
	1	120V
	2	277V
	U	120-277V
	Control	
	N	Non-Dimmng
	010	0-10V Dimmable Driver
	ELV	ELV Triac Dimmable Driver
	DMX	DMX Control (consult factory)
	DAL	Dali Dimming (consult factory)
	Mounting	
	B	Butterfly Bracket
	H	Universal Hangar Bar
	Trim/Aperture Finish	
	SN	Satin Nickel
	WH	White
	BK	Black
	CC	Custom RAL color (consult factory)
	Options	
	IC	IC-Rated



Adjustable Fixed Vertical Wall Wash